



## Bouchons pour coupleurs

Bouchons de sécurité en aluminium avec chaîne en acier inoxydable.

Bouchon pour Femelle

Bouchon pour Mâle





Code (mâle)	T	Code (femelle)	T
561.105.SPBVA204	1/4"	561.105.SPBVA304	1/4"
561.105.SPBVA206	3/8"	561.105.SPBVA306	3/8"
561.105.SPBVA208	1/2"	561.105.SPBVA308	1/2"
561.105.SPBVA212	3/4"	561.105.SPBVA312	3/4"
561.105.SPBVA216	1"	561.105.SPBVA316	1"
561.105.SPBVA220	1"1/4	561.105.SPBVA320	1"1/4
561.105.SPBVA224	1"1/2	561.105.SPBVA324	1"1/2
561.105.SPBVA232	2"	561.105.SPBVA332	2"

## Clapets anti-retour INOX 316

Tarage standard : 0,5 bar, sur demande jusqu'à 8 bar

Joint standard : VITON®, autres matière sur demande

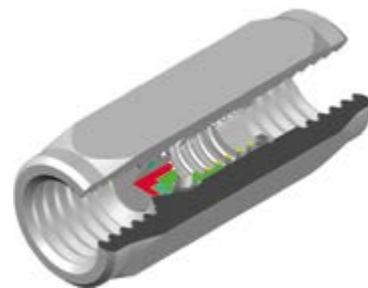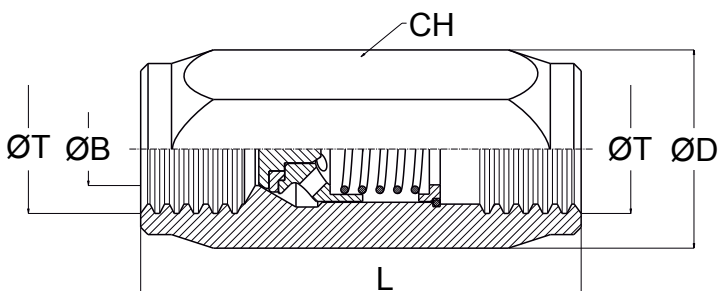

Pression de service (bar)	Code	T	millimètres			S mm <sup>2</sup>	M Kg
			B	L	CH		
350	504.018.07100X	1/8"	5	42	14	18	0,05
	504.014.07100X	1/4"	7	50	19	22	0,09
	504.038.07200X	3/8"	10	60	24	42	0,16
	504.012.07300X	1/2"	11	65	27	75	0,28
300	504.034.07400X	3/4"	17	75	34	126	0,35
250	504.100.07500X	1"	21	93	41	230	0,58
	504.114.07600X	1"1/4	29	110	50	340	0,96
	504.112.07700X	1"1/2	34	112	55	509	1,02
200	504.200.07800X	2"	48	120	75	1640	2,20

S= Section de passage