


RACCORDS ET ADAPTEURS INOX **DIN 2353** - Iso 8434-1
Union mâle DIN série L x mâle BSP (nue)

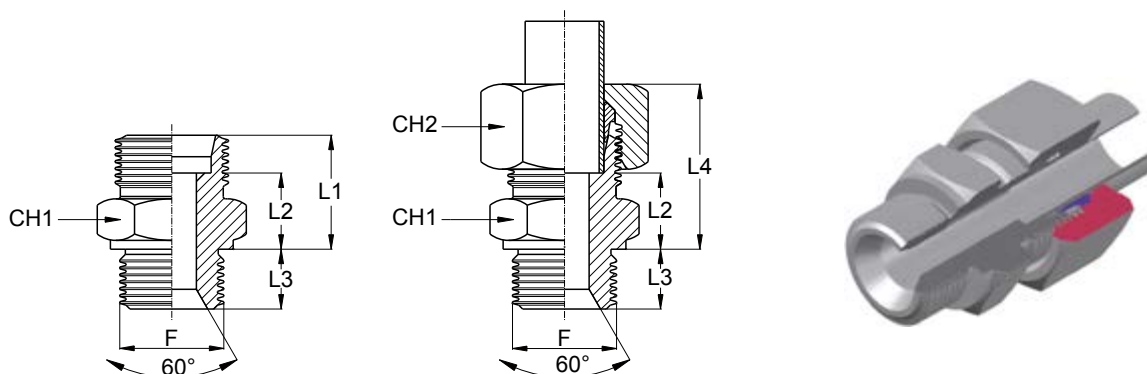

DIN Série	Pression de service (bar)	Code*	Ø ext. tube	F	L1	L2	L3	L4	CH1	CH2
L	315	64.041.092RL006S	6	1/8"	1,5	8,5	8	23	14	14
		64.041.092RL006BS	6	1/4"	17	10	12	24,5	19	14
		64.041.092RL006CS	6	3/8"	18,5	11,5	12	26	22	14
		64.041.092RL006DS	6	1/2"	19	12	14	29	27	14
		64.041.092RL008AS	8	1/8"	16,5	9,5	8	24,5	14	17
		64.041.092RL008S	8	1/4"	17	10	12	25	19	17
		64.041.092RL008CS	8	3/8"	18,5	11,5	12	26,5	22	17
		64.041.092RL008DS	8	1/2"	19	12	14	27	27	17
		64.041.092RL010AS	10	1/8"	17,5	10,5	8	25,5	17	19
		64.041.092RL010S	10	1/4"	18	11	12	26	19	19
		64.041.092RL010CS	10	3/8"	19,5	12,5	12	27,5	22	19
		64.041.092RL010DS	10	1/2"	20	13	14	28	27	19
		64.041.092RL012AS	12	1/8"	18	11	8	29	19	22
		64.041.092RL012BS	12	1/4"	19	12	12	26,5	19	22
		64.041.092RL012S	12	3/8"	19,5	12,5	12	27	22	22
		64.041.092RL012DS	12	1/2"	20	13	14	27,5	27	22
		64.041.092RL012FS	12	3/4"	21	14	16	31	32	22
		64.041.092RL015BS	15	1/4"	20	13	12	32	24	27
	64.041.092RL015CS	15	3/8"	20,5	13,5	12	28,5	24	27	
	64.041.092RL015S	15	1/2"	21	14	14	29	27	27	
	64.041.092RL015FS	15	3/4"	22	15	16	30	32	27	
	64.041.092RL018CS	18	3/8"	20	12,5	12	31	27	32	
	64.041.092RL018S	18	1/2"	22	14,5	14	31	27	32	
	64.041.092RL018FS	18	3/4"	22	14,5	16	31	32	32	
	64.041.092RL018HS	18	1"	24	16,5	18	31	41	32	
	160	64.041.092RL022CS	22	3/8"	23,5	16	12	49	32	36
		64.041.092RL022DS	22	1/2"	24	16,5	14	33	32	36
		64.041.092RL022S	22	3/4"	24	16,5	16	33	32	36
		64.041.092RL022HS	22	1"	25	17,5	18	34	41	36
		64.041.092RL022LS	22	1"1/4	26	18,5	20	39	50	36
		64.041.092RL028DS	28	1/2"	25	17,5	14	33	41	41
		64.041.092RL028FS	28	3/4"	25	17,5	16	34	41	41
64.041.092RL028S		28	1"	25	17,5	18	34	41	41	
64.041.092RL028LS		28	1"1/4	26	18,5	20	39	50	41	
64.041.092RL035FS		35	3/4"	29	18,5	16	42	46	50	
64.041.092RL035HS		35	1"	28	17,5	18	39	46	50	
64.041.092RL035S		35	1"1/4	28	17,5	20	39	50	50	
64.041.092RL035NS		35	1"1/2	30	19,5	22	44	55	50	
64.041.092RL042HS		42	1"	30	19	18	47	55	60	
64.041.092RL042LS	42	1"1/4	30	19	20	42	55	60		
64.041.092RL042S	42	1"1/2	30	19	22	42	55	60		

*Union seule, les bagues et écrous sont à commander séparément